

# Application Data Sheet

No. 7

## Autograph Precision Universal Tester

Material Testing & Inspection

### Tensile Tests of Films

Standard No. ISO527-3: 2012 (JIS K 7127: 1999)

#### Introduction

Tensile tests are widely used to evaluate plastic materials, and the results are used as indices for new materials development and for implementing quality control. Items widely evaluated as tensile characteristics of plastic materials include the tensile modulus, strength, and break strain. In this Data Sheet, break strain was measured based on displacement data acquired using an extensometer. The strength was also evaluated.

T. Murakami

#### Measurements and Jigs

Non-contact type extensometers capable of displacement measurements without affecting the sample properties are effective for accurately measuring the break strain of a film. In measuring such physical properties, the sample must be gripped evenly, suppressing the occurrence of wrinkles, so it is important to choose the grips carefully. As in this test, the use of a non-contact type extensometer/width sensor and foil grips is recommended for film tensile tests.

#### Measurement Results



Fig. 1: Test Status

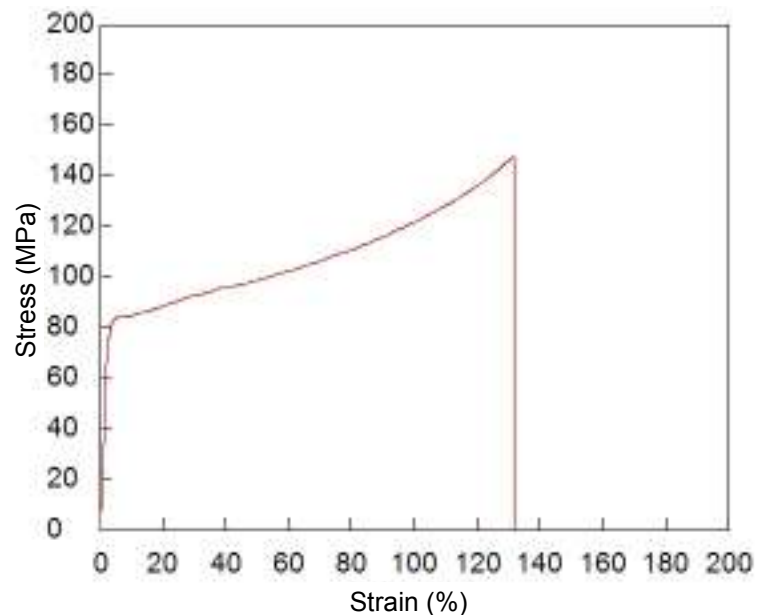


Fig. 2: Relationship Between Stress and Strain

Table 1: Test Conditions

Item	Set Value
Test Speed	50 mm/min
Initial Distance between Grips	100 mm

Table 2: Test Results

Sample	Thickness (μm)	Strength (MPa)	Break Strain (%)
PET Film	150	148	132

## Film Tensile Test System

Tester:	AGS-X
Load Cell:	1 kN
Test Jig:	1 kN grips for foils
Extensometer:	TRViewX 240S non-contact extensometer/width sensor
Software:	TRAPEZIUM X



AGS-X Table-Top Precision Universal Tester

## Features

- A high-precision load cell is adopted. (The high-precision type is class 0.5; the standard-precision type is class 1.) Accuracy is guaranteed over a wide range, from 1/500 to 1/1 of the load cell capacity. This supports highly reliable test evaluations.
- Crosshead speed range  
Tests can be performed over a wide range from 0.001 mm/min to 1,000 mm/min.
- High-speed sampling  
High-speed sampling, as fast as 1 msec.
- TRAPEZIUMX operational software  
Designed for intuitive operation, this software offers excellent convenience and user friendliness.
- Jog controller (optional)  
This allows hand-held control of the crosshead position. Fine position adjustment is possible using the jog dial.
- Optional Test Devices  
A variety of tests can be conducted by switching between an abundance of jigs in the lineup.

First Edition: February 2013



Shimadzu Corporation

[www.shimadzu.com/an/](http://www.shimadzu.com/an/)

For Research Use Only. Not for use in diagnostic procedures.  
The content of this publication shall not be reproduced, altered or sold for any commercial purpose without the written approval of Shimadzu. The information contained herein is provided to you "as is" without warranty of any kind including without limitation warranties as to its accuracy or completeness. Shimadzu does not assume any responsibility or liability for any damage, whether direct or indirect, relating to the use of this publication. This publication is based upon the information available to Shimadzu on or before the date of publication, and subject to change without notice.

© Shimadzu Corporation, 2013