



◆Model number

SGP2 - **36** **F** **1** **H** **1** - **L** **XXX**

1
2
3
4
5
6
7
8
9


- | | | | |
|--|---|---|---|
| <p>1 Series number
SGP2 series</p> <p>2 Mounting spigot diameter
- : $\phi 82^{+0.036}_{-0.030}$ Z : $\phi 102^{+0.036}_{-0.030}$
A : $\phi 82.55^{+0.05}_{-0.05}$ B : $\phi 101.6^{+0.05}_{-0.05}$</p> <p>3 Size</p> | <p>4 Position of ports
F : rear cover side ports
D : rear ports</p> <p>5 Port configuration
1 : flange port (sides only)
2 : G screw thread</p> | <p>6 Mounting
H : horizontal 2 bolts</p> <p>7 Shaft end
1 : SAE Spline 13 teeth</p> | <p>8 Rotation viewing from shaft end
L = counterclockwise
R = clockwise</p> <p>9 Code number in 3 figures</p> |
|--|---|---|---|

◆Specifications

Size	Displacement		Rated pressure			Max. peak pressure			Speed min ⁻¹		Inlet pressure	Mass	
	cm ³	in ³	MPa	bar	psi	MPa	bar	psi	MIN.	MAX.		kg	lb
20	20.3	1.238	24.5	245	3553	29.4	294	4263	400	3000	bar -0.20~2.0	4.9 (4.4)	10.78 (9.68)
23	23.3	1.421										5.1 (4.6)	11.22 (10.12)
25	25.3	1.543										5.3 (4.8)	11.66 (10.56)
27	27.4	1.671										5.4 (4.9)	11.88 (10.78)
32	32.5	1.983										5.7 (5.1)	12.54 (11.22)
36	36.5	2.227								3000 (2500)	MPa -0.02~0.2	5.9 (5.3)	12.98 (11.66)
40	40.6	2.477	22.6	226	3277	27.5	275	3988		2500 (2300)		6.1 (5.4)	13.42 (11.88)
44	44.7	2.727	20.6	206	2987	24.5	245	3553		2300 (2300)	psi -2.9 ~29	6.3 (5.6)	13.86 (12.32)
48	48.7	2.970	18.6	186	2697	22.6	226	3277		2300 (2000)		6.6 (5.9)	14.52 (12.98)
52	52.8	3.221	17.2	172	2494	20.6	206	2987		2200 (2000)		6.8 (6.1)	14.96 (13.42)

NOTE : () Rear Ports

◆Typical assembly

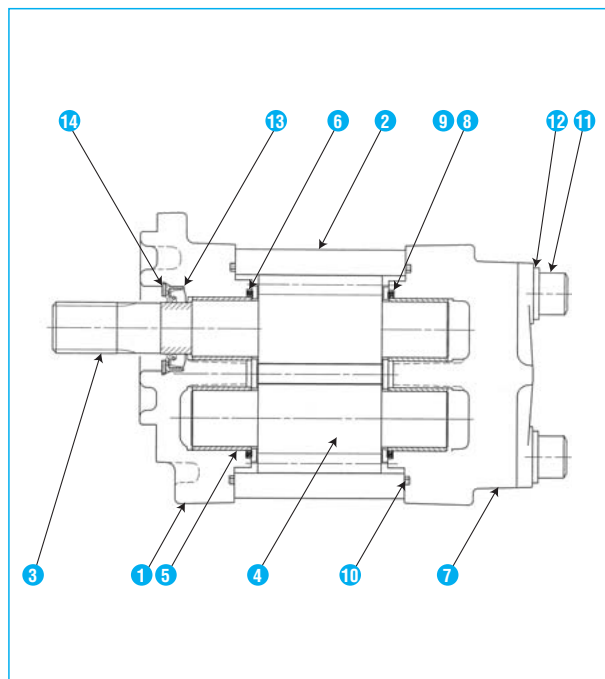


Item No.	Name	QTY	Material
1	Front cover	1	Aluminum alloy
2	Body	1	Cast iron
3	Drive gear	1	Alloy steel
4	Driven gear	1	Alloy steel
5	Bush	4	Special alloy steel
6	Side plate	2	Special alloy steel
7	Rear cover	1	Aluminum alloy
8	Back-up	2	Synthetic resin
9	Gasket	2	Nitrile rubber
10	Gasket	2	Nitrile rubber
11	Bolt	4	Alloy steel
12	Washer	4	Carbon steel
13	Oil seal	1	Nitrile rubber
14	Retainer ring	1	Carbon tool steel

NOTES : "QTY" shows the amount per one


◆ Outline dimensions

dimensions in mm

SGP2_A□F1H□-LXXX (Side ports)

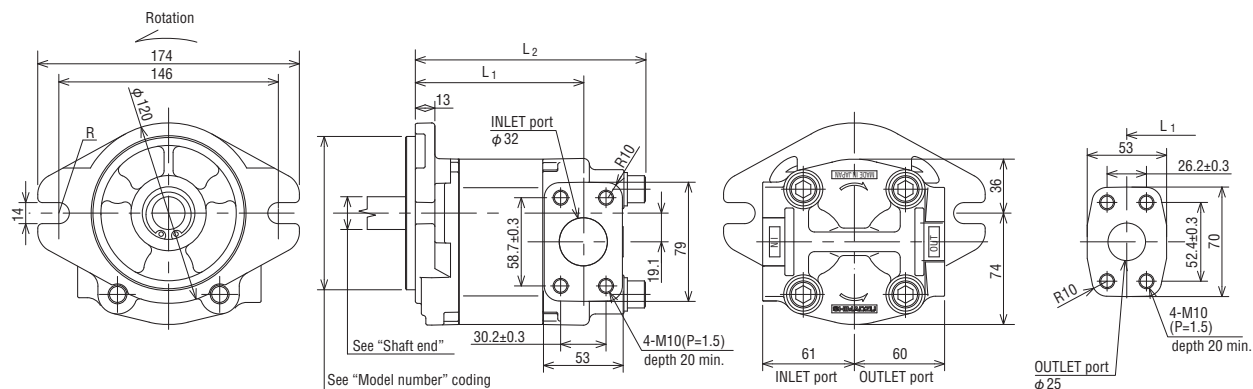

SGP2_A□D2H□-LXXX (Rear ports)

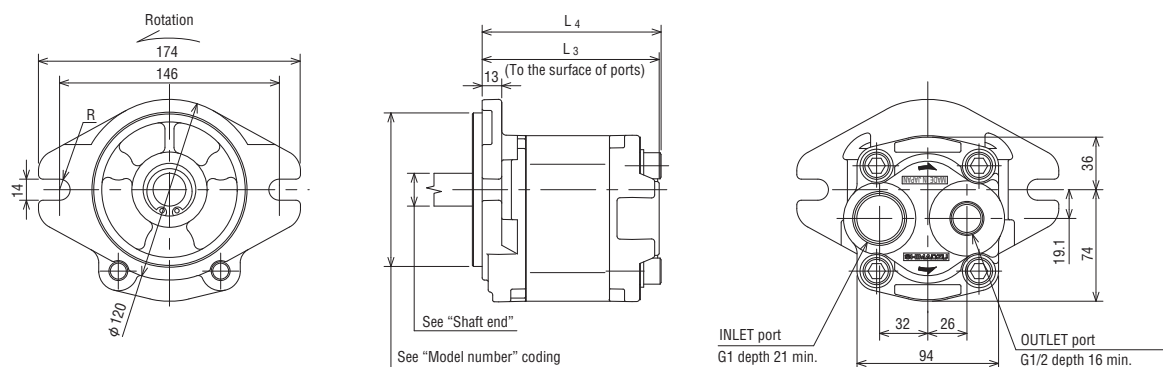

NOTE 1. Figure shown indicated counterclockwise rotation "L" viewing from shaft end. Clockwise rotation "R" is mirror image of this.


2. Unless otherwise specified, tolerance on dimension are ± 1.0 mm.

Size	Side ports		Rear ports	
	L_1	L_2	L_3	L_4
20	95.6	138	101.6	104
23	98.6	141	104.6	107
25	100.6	143	106.6	109
27	102.6	145	108.6	111
32	107.6	150	113.6	116
36	111.6	154	117.6	120
40	115.6	158	121.6	124
44	119.6	162	125.6	128
48	123.6	166	129.6	132
52	127.6	170	133.6	136

● Shaft end

SAE Spline (Some dimensions are different form SAE standard.)

SAE Spline 13 teeth




No. of tooth : 13
D.P. : 16/32
Pressure angle : 30°
Over pin dia. : 24.891~
24.819
Pin dia. : $\phi 3.048$


SGP2 Series Performance curves

OIL: ISO VG32 Hydraulic Fluid at 40°C


SGP2-20

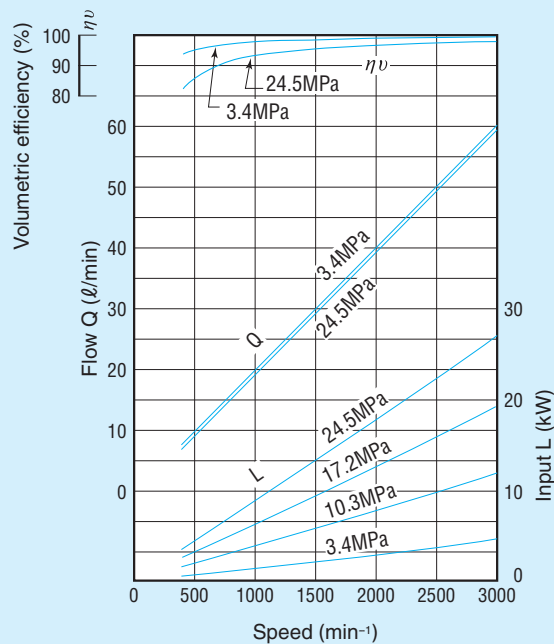


SGP2-23

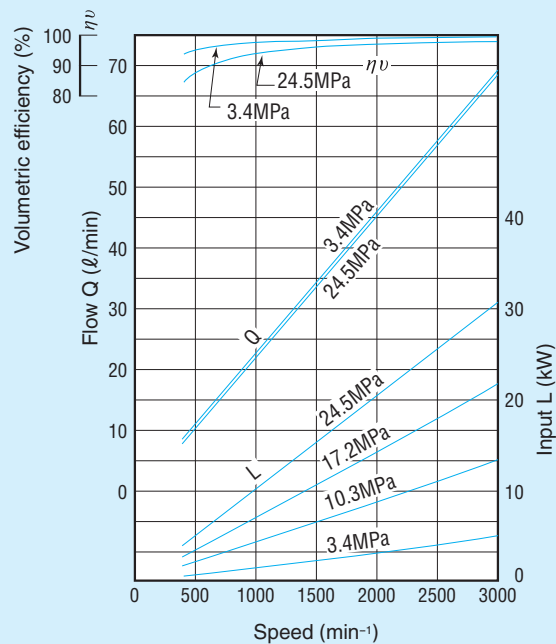

SGP2-25

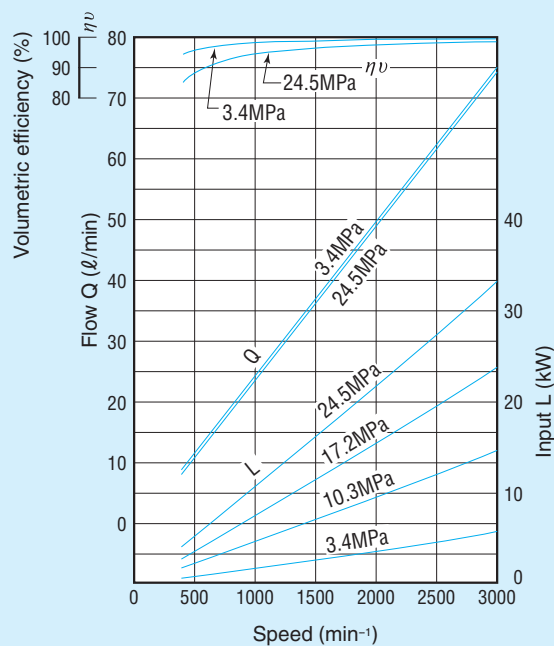


SGP2-27

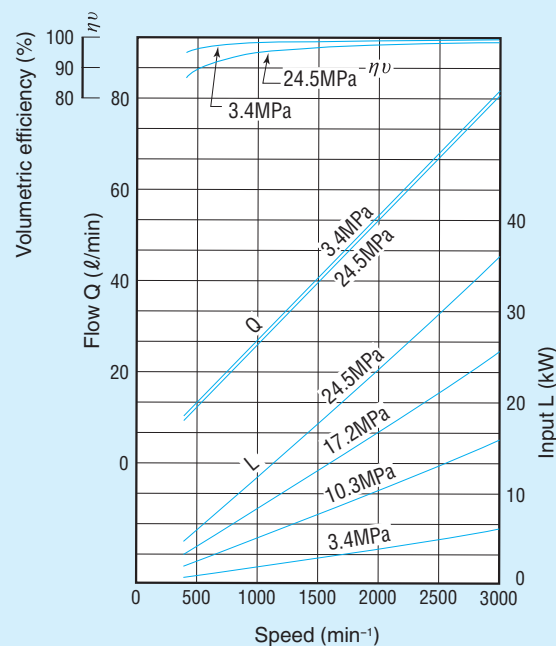


SGP2 Series Performance curves

OIL: ISO VG32 Hydraulic Fluid at 40°C


SGP2-32

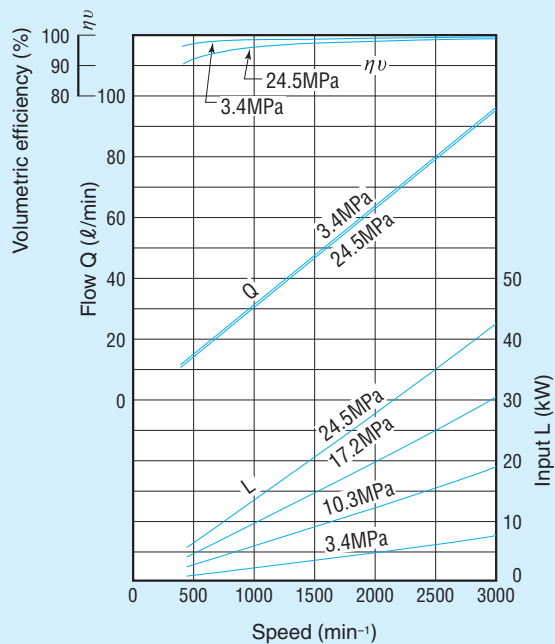


SGP2-36

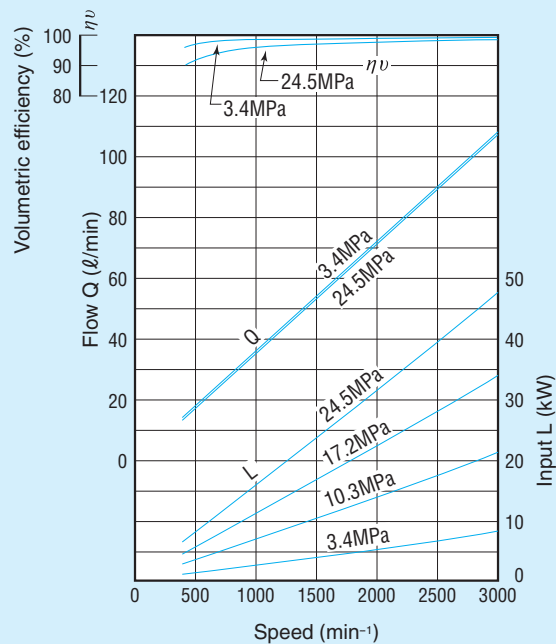

SGP2-40

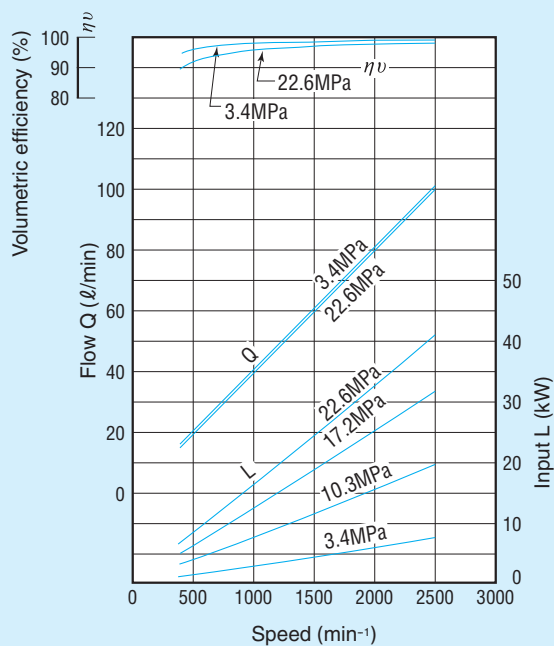


SGP2-44

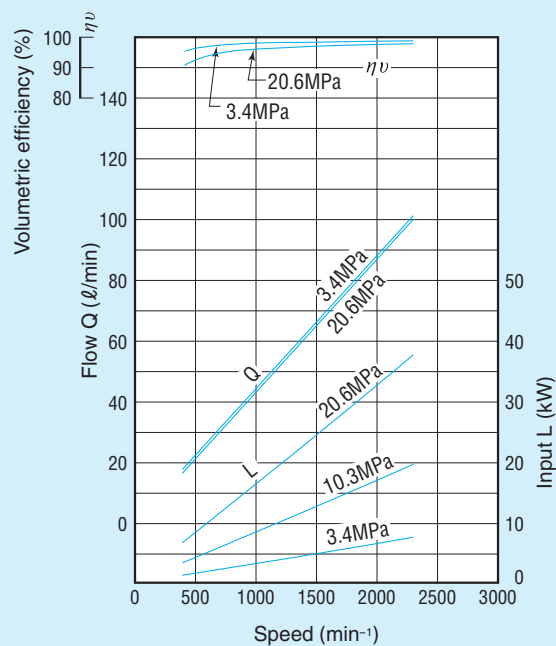

SGP2 Series Performance curves

OIL: ISO VG32 Hydraulic Fluid at 40°C

SGP2-48

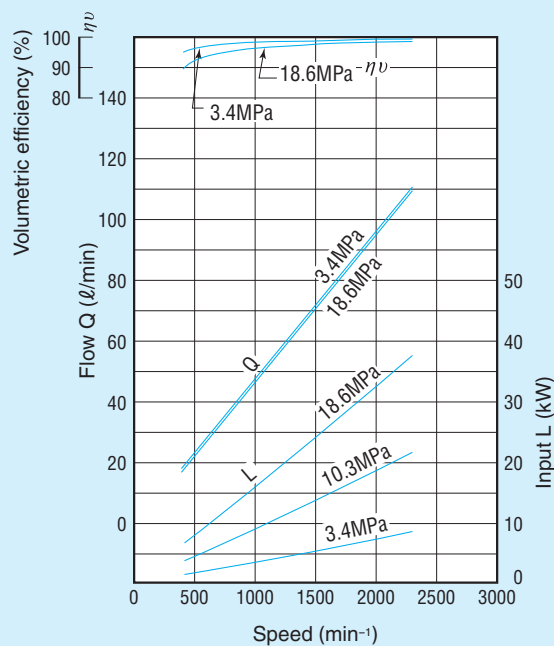

SGP2-52

